# Gold Standard for the Global Goals Key Project Information & Project Design Document (PDD)



Version 1.1 - August2017

101.1 T PDD Page 1 of 33

### **KEY PROJECT INFORMATION**

Title of Project:	Biogas Support Program – Nepal Activity-3
Brief description of Project:	The Biogas Support Program - Nepal Activity-3
'	implemented by the Alternative Energy
	Promotion Centre (AEPC) aims to promote
	biogas digesters (biogas units) to households in
	the rural areas of Nepal. This Project Activity
	(PA) is registered as Clean Development
	Mechanism (CDM) Project on 13 December 2011.
	This project includes 20,254 biogas digesters
	which were implemented between 07/04/2005
	and 08/05/2006. The project has already
	completed its 1 <sup>st</sup> crediting period and running
	under 2 <sup>nd</sup> crediting period for CDM. The second
	CDM crediting period starts from 13/12/2018 to
	12/12/2025.
Expected Implemetation Date:	Implementation date: 07/04/2005 to 08/05/2006
Expected duration of Project:	Project duration: 20 years from the start date
Project Developer:	Alternative Energy Promotion Centre (AEPC)
Project Representative:	Alternative Energy Promotion Centre (AEPC)
Project Participants and any communities	Alternative Energy Promotion Centre (AEPC)
involved:	
Version of PDD:	01
Date of Version:	10/07/2020
Host Country / Location: Certification Pathway (Project Certificatin/Impact	Nepal
Statements & Products	impact statements & products
Activity Requirements applied:	GS4GG (Renewable Energy Activity
(mark GS4GG if none relevant)	requirements)
Methodologies applied:	AMS I.E. version og
Product Requirements applied:	GS-CER
Regular/Retroactive:	Retroactive registration
SDG Impacts:	1- SDG 3
	2 – SDG 7
	3 – SDG 13
Estimated amount of SDG Impact Certified	SDG 3: 100% users percept reduction in health problem
	SDG 7: 100% users felt the reduction on firewood
	collection time due to clean energy access
	(Biogas)
	SDG 13: 74,082 tCO2eq

101.1 T PDD Page 2 of 33

#### SECTION A. Description of project

#### A.1. Purpose and general description of project

The purpose of this project is to promote household biogas digesters and biogas stoves to households with one or two cattle located in Nepal through the capacity enhancement of the private sector to be able to carry out feasibility, installation and after sales services of the biogas plants. The digesters enable households to displace firewood and fossil fuels with biogas from animal waste and human excreta. The generated biogas will feed biogas cook stoves, and replace the firewood used for cooking in wood stoves in the baseline scenario. The replacement of firewood that is non renewable biomass (NRB) is counted as emission reduction under the Clean Development Mechanism (CDM). Emission reductions are determined by defining the percentage of NRB in the firewood replaced, since firewood is the only biomass source replaced by the project of which a part is NRB.

This project is centrally managed by the Alternative Energy Promotion Centre (AEPC) with the support of Biogas Sector Partnership Nepal (BSP-NEPAL) the implementing agency of AEPC. AEPC is a government entity that executes renewable/alternative energy programs in Nepal, including this project.

The proposed project activity includes 20,254 digesters which were implemented between 7 April 2005 and 8 May 2006. Table 1 provides an overview of the digesters, categorised according to their size and location.

· abier iiii 2 · gesteis iistea iii tiile 2 · e gas seppert i · e g. aiii · i · repair teatitie, 5				
Region Size (m <sup>3</sup> )	Terai	Hill	Mountain or Remote Hill	Total
4	420	2,184	74	2,678
6	9,442	5,721	97	15,260
8	1,884	205	1	2,090
10	207	19	0	226
Total	11,953	8,129	172	20,254

Table A.1: Digesters listed in the Biogas Support Program - Nepal Activity-3

Major activities under the project include:

- 1. Assigning investment subsidies and support in providing micro credit facilities to reduce then investment barrier for households.
- 2. Quality control and assurance, monitoring and biogas program evaluation to ensure long-term performance of the digesters and ensure that digester companies deliver their maintenance obligations.
- 3. Support innovation in many aspects of the program including digester design and program monitoring.
- 4. Raising awareness among potential users about the possibilities and advantages of the digesters.
- 5. Carry out capacity building activities targeted at the digester companies, including training in digester production and implementation but also training in business management.
- 6. Motivate and train new biogas companies in remote areas to expand their coverage and enable further expansion of the areas served by biogas companies.

#### Contribution to Sustainable Development

The BSP has a range of sustainable development benefits which are fully attributable to the project:

- Improved living conditions in and around the households due to a significant reduction of smoke and fumes from cooking.
- Reduced deforestation, avoiding loss of biodiversity and soil erosion.

101.1 T PDD Page 3 of 33

- Reduced time spent on fuel collection.
- Improved sanitary conditions in and around the house, in particular when connecting the toilet to the digester.
- Improved safety (less fire incidents)
- Improved fertilizer quality through the production of bio-slurry.
- Reduced dependence of households on purchased fuels and purchased chemical fertilizers.

According to the project standard for the CDM project activity, the project activity belongs to Type I: Renewable Energy Projects as the maximum output from the project is below 45 MW<sub>th.</sub> There are 20,254 Biogas individual units under the project activities with the estimated capacity ranges from 1.16 KW to 2.32 KW, the individual bio-digester also qualifies for the Type-I Micro-scale project which meets the limit of micro-scale of 5 MW capacity. The estimated average annual emission reduction from the project activity during this crediting period is 74,082 tCO2eq.

#### A.2. Eligibility of the project under Gold Standard

As the project has eligibility under Clean Development Mechanism (CDM) and is successfully implemented under CDM, this has also been eligible for GS4GG as the project activity involves dissemination of household biogas which is eligible under Gold Standard pursuant to clause 3.1.1 of the GS4GG Principles and Requirements document. The GS has published Renewable Energy Activity Requirements, therefore the proposed project falls under the automatic eligibility list of projects.

## A.3. Legal ownership of products generated by the project and legal rights to alter use of resources required to service the project

The technology used in this project activity is the household level biogas plants and the owner of the technology is the particular household using biogas plants. The owners of a digester signed an agreement with AEPC by transferring all legal rights, interests, credits, entitlements, benefits or allowances arising from or in connection with any greenhouse gas emissions reductions arising from the operation of the digester (Emission Reduction), and agrees to take all necessary action required to ensure the transfer of those Emission Reductions to the Alternative Energy Promotion Centre or its nominee, including executing any relevant documents. So, the ownership of the products that are generated under Gold Standard Certification is under Alternative Energy Promotion Centre.

#### A.4. Location of project

#### A.4.1. Host Country

Nepal

#### A.4.2. Region/State/Province etc.

The PA is distributed all over Nepal

#### A.4.3. City/Town/Community etc.

The PA database contains the following information for each digester: owner's name, VDC/NP, ward number or cluster, district, region, plant size, name of Installation Company, digester code and the commissioning date.

#### A.4.4. Physical/Geographical location

The digesters in this PA are located at various locations across Nepal. The geographical coordinates of Nepal are:

Latitude – North 26.20 degree to North 30.45 degree Longitude – East 80.07 degree to East 88.20 degree

101.1 T PDD Page 4 of 33

The PA database contains the following information for each digester: owner's name, VDC/NP, ward number or cluster, district, region, plant size, name of Installation Company, digester code and the commissioning date.

#### A.5. Technologies and/or measures

The existing traditional stoves used in the baseline are simple structures made from clay or having stone or metal tripods with poor combustion air supply or flue gas ventilation system i.e. without a grate or a chimney. These stoves use non-renewable biomass (firewood).


The target group of the project are households with at least one head of cattle (generally cows or buffalos) who currently use non-renewable woody biomass (firewood) and/or fossil fuels (kerosene and/or LPG) for cooking purposes. The project aims to utilize the methane produced from household biogas digesters to replace the current non-renewable energy sources that is used by households. The main feedstock for digesters is cattle manure and human excreta. Digesters are available in different sizes. The size of the digester suitable for a given household depends on the number of people living in the house and the number of head of cattle present.

The technology is environmentally sound. The digesters provide a decentralized source of energy and bring several sustainable development benefits as indicated in section A.1. The project also contributes to technology transfer since the technology is based on a Chinese design which has been tailored to the Nepalese situation with support of the Netherlands Development Organization SNV.

#### Technical Description of the project activity

The technologies used in the proposed project are biogas stoves that are fed by household biogas digesters. The digesters have a sludge and gas holding capacity range of up to 10 m<sub>3</sub>. The biogas plants are based on a uniform technical design and are manufactured and installed following established technical standards in Nepal. These digesters include a compartment for the preparation of the digester feedstock at the inlet, the main digester and an overflow for the digestion product. The digester itself is a closed underground container made of concrete or other materials.

The feedstock consists mainly of cattle manure and human excreta to which water is added. The biogas is extracted from the digester and transported to a stove. The digester has an overpressure which creates a stable flow of gas for use in the cooking stoves. The gas has a methane content of 52%. The biogas produced from the digester will be fed into the stove. The biogas consumption of each stove is 400 litre/hour.

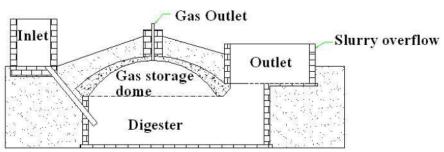

#### A.6. Scale of the project

The PA is small scale and is not a de-bundled component of a large CDM project. Each of the independent sub-systems (bio digesters) included in the PA is not greater than 1% of the threshold defined for a small scale project. According to the project standard for the CDM project activity, the project activity belongs

101.1 T PDD Page 5 of 33

-

<sup>&</sup>lt;sup>1</sup> Guidelines on Assessment of Debundling for SSC Project Activities – Version 03, (EB 54, Annex 13)

to Type I: Renewable Energy Projects as the maximum output from the project is below 45 MW $_{th}$ . There are 20,254 Biogas individual units under the project activities with the estimated capacity ranges from 1.16 KW to 2.32 KW.

#### A.7. Funding sources of project

The project activity is a sub-project of the BSP-Nepal umbrella biogas program that received funding from Parties namely the German Development Bank (KfW) and the Directorate General for International Cooperation of the Government of the Netherlands (DGIS) through SNV as well as funding from Government of Nepal (GoN) through the Alternative Energy Promotion Center (AEPC). The providers of the public funding will not purchase any emission reductions generated by the proposed project and affirms that the funding of the project activities for the biogas program has not resulted in the diversion of ODA and that this funding is not counted towards the financial obligation of the concerned Parties. Additionally AEPC has also affirmed the same understanding regarding this funding.

#### A.8. Assessment that project complies with 'gender sensitive' requirements

The PA meets the mandatory gender requirements. Following three steps stipulated in the gender requirements elaborates the gender sensitiveness of the PA.

#### Step 1: Basic Concepts:

Does the project reflect the key issues and requirements of Gender Sensitive design and implementation as outlined in the Gender Policy? Explain how.

The project reflects the key issues and requirements of Gender Sensitive design and implementation as outlined in the Gender Policy. As the Gold Standard Gender Policy recognizes that gender relations, roles and responsibilities exercise important influence on women and men's access to and control over natural resources and the goods and services they provide, the project has given access to biogas to both men and women without inequality. Since the cooking and household chores in Nepal basically comes under the women's activity, the biogas promoted under the PA contributes multiple benefit to the women and children. The project meaningfully address attribution, generate livelihood benefits and promote approaches that enable women and men to more equitably contribute to and benefit from the project. The Biogas User Survey is being done continuously for the PA and from the regular survey, it is evidenced that the time for firewood collection and cooking has been reduced and is perceived by the users incase of men, women and children. The time saving that they achieved from the biogas is being used for other income generating activities and social activities. The health of the users especially women have been improved caused by air pollution. It basically offers the drudgery reduction of women and children and also provides the leverage to the women to involve in economic activities and other social participation utilizing the time saved for the firewood collection. Considering the size of the technology and the service that it offers, it has potential to enable women economically which help reduce discrimination against women rather than deepening it.

Does the project align with existing country policies, strategies and best practices? Explain how.

Being a focal government entity to promote renewable energy in Nepal, the PD follows Renewable Energy Subsidy Policy<sup>2</sup> which has provisioned the additional support to construct Biogas for "targeted beneficiary group (women-led households with dependent children, earthquake victims from earthquake affected districts, endangered indigenous community identified by GoN and Dalit). PD has also developed the GESI Policy<sup>3</sup> which is given in Nepali language and it focuses on improving livelihood assets and capacities of women, poor and the excluded so that they can have access to different energy source. In addition, as per

101.1 T PDD Page 6 of 33

-

<sup>&</sup>lt;sup>2</sup>https://www.aepc.gov.np/uploads/docs/2018-06-19\_RE%20Subsidy%20Policy,%202073%20(English).pdf

<sup>3</sup> https://www.aepc.gov.np/uploads/docs/l-uu-l-1542168651.pdf

the Gender Equality and Social Inclusion Policy of AEPC it has mentioned that it will enhance their voice so that they can recognize their rights and influence decisions affecting them. So in every stakeholder consultation of renewable energy projects, it has to be ensure the women's participation and their comments are addressed.

The rural energy policy<sup>4</sup> of Nepal also ensures the implementation of the special programmes of promotional activities that emphasize on access to rural energy and role of rural energy in sustainable development, poverty reduction and positive impacts on women and children. As the rural energy is directly linked to activities traditionally carried out by the women in Nepal, the policy also emphasizes on the implementation of such technologies considering it as an integral part of the women's enabling activities. So, all the technologies are implemented under those national policies (rural energy policy and subsidy policy).

#### Step 2: Apply Gold Standard Safeguarding Principles

Does the project align with existing country policies, strategies and best practices? Explain how.

The project addresses questions raised in the Gold Standard Safeguarding Principles & Requirements document. It basically offers the drudgery reduction of women and children and also provides the leverage to the women to involve in economic activities and other social participation utilizing the time saved for the firewood collection. Considering the size of the technology and the service that it offers, it has potential to enable women economically which help reduce discrimination against women rather than deepening it. The detail analysis of the safeguarding principles realted to this is elaborated under component 3.2 of the safeguarding principles under section D of this PDD.

#### Step 3: Conduction of stakeholder consultation

Does the project apply the Gold Standard Stakeholder Consultation & Engagement Procedure, Requirements & Guidelines? Explain how.

Biogas digesters are sold to households throughout Nepal. Stakeholder consultation in the context of a consumer technology like a biogas digester is automatically built into the sales process. The consultation process involved detailed household survey of randomly selected biogas users and non-users of the selected Village Development Committees (VDCs) representing the major ethnic/caste groups of the two sample districts, focus group discussion with potential biogas users, and key informants interviews of knowledgeable persons contacted during the visits. User satisfaction and time saving for women for cooking other benefits have been monitoring regularly.

#### SECTION B. Application of selected approved Gold Standard methodology

#### B.1. Reference of approved methodology

The title and reference of the approved baseline and monitoring methodology applied to the small-scale project activity are as follows:

Title: Type I - Renewable energy project

Reference: AMS-I.E – Switch from Non-Renewable Biomass for Thermal Applications by the User, Version 09,

The detail of the methodology can be accessed from the UNFCCC website:

http://cdm.unfccc.int/methodologies/DB/IO5FJLJFWT91R6B8SO5BC7TXSK27I2

101.1 T PDD Page 7 of 33

<sup>4</sup> https://www.aepc.gov.np/uploads/docs/2018-06-24\_Rural%20Energy%20Policy,%202006%20(English).pdf

#### B.2. Applicability of methodology

AMS-I. E. "Switch from Non-Renewable Biomass for Thermal Applications by the User" Version og is applicable to the proposed project because the project meets all applicability criteria. The applicability of the methodology is outlined as below:

Criteria AMS-I.E.	Explanation
This category comprises activities to displace the use of non-renewable biomass by introducing renewable energy technologies. Examples of these technologies include but are not limited to biogas stoves, solar cookers, passive solar homes	The biogas cook stoves used in the project are indeed "activities to displace the use of non-renewable biomass by introducing renewable energy technologies". AMS-I.E. even lists biogas stoves as an example of eligible end user technologies.
Project participants are able to show that non-renewable biomass has been used since 31 December 1989, using survey methods.	The BUS for the period 2017/18 demonstrated that the time needed to gather firewood, the price of firewood and the distance travelled to gather firewood is increasing at least since December 1989. In that survey the respondents were asked to provide averages for the time needed to gather firewood, the distance travelled and the price. The average of the estimates from all respondents, showed a clear increase on all three indicators.
The methodology is applicable for technologies displacing use of non-renewable biomass by renewable energy.	The Project is displace the usage of traditional fire wood based cook stoves hence applicable
Project participants or coordinating and managing entities shall describe in the PDD/PoA-DD how the double counting of emission reductions has been addressed (e.g. between end users, distributors and producers of stoves).	The Biogas digesters distributed in Nepal by AEPC is identified uniquely by the gas pipe number, hence double counting is avoided. The database for each project is maintained by the PP which can be verifiable.
For project activities introducing bio-ethanol cook stoves, project participants or coordinating and managing entities shall demonstrate that the bioethanol cook stoves are designed, constructed and operated to the requirements (e.g. with regard to safety) of a relevant national or local standard or comparable literature. Latest guidelines issued by a relevant national authority or an international organisation may also be used.	The Project is using biogas digesters and bio-ethanol is not used and safety requirement does not arise here. Hence it is applicable

It is clarified that the change in the fraction of non-renewable biomass sought through the post registration change to the project does not impact the application of the approved baseline methodology, as well as additionality of the project activity and scale of the project activity and applicability (paragraph 10c, Annex 66, EB48).

#### B.3. Project boundary

According to AMS-I.E, the project boundary is the physical, geographical site of the use of biomass or the renewable energy. At the unit level, the project boundary is defined by the individual sites and refers to the operation of the biogas digester units at the household level. Table below shows the emission sources that

101.1 T PDD Page 8 of 33

are under the control of the project participants and attributable to biogas digesters. Figure B.4.1 and B.4.2 show the physical relation between the emission sources and the project boundary.

Source		GHG	Included?	Justification/Explanation
	Emissions from NRB use for cooking		Yes	Main emission source.
a)		CH <sub>4</sub>	No	Excluded for simplification.
Baseline		N₂O	No	Excluded for simplification.
3ası	Emissions from fossil fuel use for	CO2	No	Excluded for simplification.
	cooking	CH <sub>4</sub>	No	Excluded for simplification.
		N <sub>2</sub> O	No	Excluded for simplification.
<b>₽</b>	Emission from digester and biogas	CO2	No	This is not required by AMS.I.E
Project activity	cooking stove	CH <sub>4</sub>	No	This is not required by AMS.I.E
ac P		N₂O	No	This is not required by AMS.I.E



Figure B.4.1: Baseline emissions. Sources of GHG emissions and uses

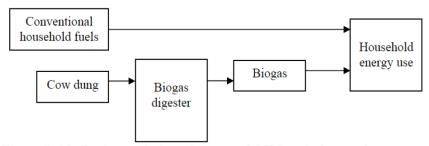


Figure B.4.2: Project emissions. Sources of GHG emissions and uses

#### B.4. Establishment and description of baseline scenario

As per the per the Procedures for renewal of the crediting period of a registered CDM project activity, Version o6 (EB 63, Annex 29) and as per paragraph 286 of the CDM Standard for project activities version 2, the demonstration of the validity of the original baseline or its update does not require a reassessment of the baseline scenario, but rather an assessment of the emissions which would have resulted from that scenario. For cooking, rural households use non renewable biomass as firewood, cow dung and agricultural waste. The use of fossil fuels like kerosene and LPG is insignificant. Research indicates that use of firewood has a low sensitivity to economic determinants. As the small scale project activity displaces the use of non renewable biomass by introducing a renewable energy technology, AMS-I.E, Version o9 is used to estimate the emission reductions for the third crediting period. According to AMS-I.E, Version o9, "in the absence of the project activity, the baseline scenario would be the use of fossil fuels for meeting similar thermal energy needs". As per the methodology, the baseline scenario adopted for the project is the use of fossil fuels for thermal energy applications. This is a conservative approach to determine the baseline scenario. For the third crediting period, the Methodological tool "Assessment of validity of the

101.1 T PDD Page 9 of 33

original/current baseline and update of the baseline at the renewal of a crediting period" Version 03.0.1 (EB 66, Annex 47) is used to assess the continued validity of the original baseline. This tool provides a stepwise procedure to assess the continued validity of the baseline and to update the baseline at the renewal of a crediting period.

#### Step 1: Assess the validity of the current baseline for the next crediting period

The "Procedures for the renewal of the crediting period of a registered CDM project activity" requires assessing the impact of new relevant national and/or sectoral policies and circumstances on the baseline.

## Step 1.1: Assess compliance of the current baseline with relevant mandatory national and/or sectoral policies

There are no mandatory national and/or sectoral policies that affect the baseline scenario during the renewal of the crediting period.

The fundamental elements of the baseline have not changed since the project was first registered. The relevant national and sectoral policies for the promotion of the biogas digester in the Nepal are the Rural Energy Policy, the Renewable (Rural) Energy Subsidy Policy and the Renewable (Rural) Energy Subsidy Delivery Mechanism.

The Rural Energy Policy was published in the year 2006. The Renewable (Rural) Energy Subsidy Policy was initially published in 2000 (prior to project start date) and latest revision has happened in 2016. Similarly, the Renewable (Rural) Energy Subsidy Delivery Mechanism was initially published in 2000 (prior to project start date) and latest revised in 2017.

The Renewable (Rural) Energy Subsidy Policy has made provisions of financial subsidy support for the installation of the household biogas plants. The Rural Energy Policy has put emphasis to increase efficiency, reduce cost of the household biogas production technology, and to promote it in high mountains.

The Renewable (Rural) Energy Subsidy Policy 2016 has made provisions of financial subsidy support for the installation of the household biogas plants in the range from 2, 4, 6, m³ and above. The subsidy support is categorised based on the location of the biogas plants in the Terai (Southern Plains), Hills and Remote Hills. The subsidy support provided would cover a maximum of around 40% cost of installation of the biogas plants.

The Renewable (Rural) Energy Subsidy Delivery Mechanism, prepared based on the Subsidy Policy, has made arrangements to channel the subsidy to the biogas users through the pre-qualified biogas companies, which provide installation and after sales services related to biogas as per the standard and guidelines approved by the AEPC.

The above policies only provide the incentives for the installation of household biogas plants and do not provide any obligations or enforced targets, nor do they ban the use of fuel wood for cooking. The baseline scenario established for the project is therefore still valid.

#### Step 1.2: Assess the impact of circumstances

There is no impact of circumstances existing at the time of requesting renewal of the crediting period on the current baseline emissions.

As demonstrated in Step 1.1, the promotion of household biogas plants through national policies set up is on voluntary basis. The Renewable (Rural) Energy Subsidy Delivery Mechanism is part of the package design to enhance the Biogas Support Program. No other market transformation activities or circumstances outside the implementation of the BSP have influenced households shift from non-renewable biomass for cooking in rural areas or the shift to rural households biogas plants using renewable

101.1 T PDD Page 10 of 33

biomass. The deployment of BSP has continued during the first crediting period of the Project Activity 2. As described in Step 1.3, despite the policies, NRB continue to be the main energy source for cooking in rural areas. This is confirmed by the Biogas Users Survey 2017/18 for the Project Activity 3. The conditions used to determine the baseline emission in the previous crediting period are still valid.

## Step 1.3: Assess whether the continuation of use of current baseline equipment(s) or an investment is the most likely scenario for the crediting period for which renewal is requested

This sub-step is applicable to the project activity since the baseline is the continuation of the existing practice, i.e. the households will rely on traditional cook stoves using non-renewable biomass in the absence of the project activity. The traditional stoves made from local materials are expected to continue in the absence of the project. Therefore, the continued use of baseline materials is possible.

To confirm that NRB based cook stoves continue to be used, the project participants conducted a survey to check whether the firewood replaced by the digesters is subject to the trends defined in AMS-I.E.: version og increasing amount of time needed or distance travelled for firewood gathering, increasing firewood prices or changes in the type of firewood used. The indicators selected to monitor the continued displacement of NRB in the project are:

- 1) Increase in time needed to gather firewood or increase in distance travelled to gather firewood
- 2) Increasing trend in fuel wood price.

The Biogas Users Survey 2017/18 reveals the following:

- Increase in time and distance travelled to gather firewood. Average time taken to reach forest, collect fuelwood, and return home has increased from 41, 109 and 51 minutes in 1989 to 47, 118 and 56 minutes in 2000 and 48, 140 and 59 minutes in 2018. This indicate that the sourcing biomass from forest over the years have become even more difficult.
- •
- Increase in fuel wood price: The results reveal that the average price of bhari of fuelwood was NPR 39 in 1989 which increased to NPR 121 in 2000 and to NPR 476 in 2018.

As it can be seen that, the continuation of use of current baseline equipment, (non-renewable biomass based cook stove) is the most likely scenario for this crediting period.

#### Step 1.4: Assessment of the validity of the data and parameters

There are some parameters such emission factors per fuel source (IPCC default values), emission reduction factor of the biogas units, which were determined at the start of the first crediting period and not monitored during the first crediting period, are not valid anymore. AMS-I.E, Version og provides new guidance on key parameters, different default values and emission reductions calculation formulas. So the current baseline was updated for the third crediting period according to the AMS-I.E, Version og. Application of Steps 1.1, 1.2, 1.3 and 1.4 confirmed that the current baseline is valid for the third crediting period, but data and parameters needs to be updated. Therefore step 2 is used.

## Step 2: Update the current baseline and the data and parameters Step 2.1: Update the current baseline

The baseline emissions for the third crediting period have been assessed based on the latest approved version of the AMS-I.E (Version og). More details on the updated baseline emissions for the third crediting period can be seen in section in B.6.

#### Step 2.2: Update the data and parameters

As mentioned in step 1.4 above, many default parameters have been updated and new parameters have been used (as per AMS-I.E Version 09) for this third crediting period. More details can be seen in sections B.6 and B.7 on the monitoring parameters relevant for the third crediting period.

101.1 T PDD Page 11 of 33

#### B.5. Demonstration of additionality

The additionality of the PA is demonstrated in line with "Standard on the Demonstration of additionality, development of eligibility criteria and application of multiple methodologies for programme of activities, Version 03". If the above indicated eligibility criteria on technology and thresholds are met, additionality is complied with automatically. Thus there is no need for further assessment and demonstration of additionality.

#### B.6. Sustainable Development Goals (SDG) outcomes

#### B.6.1. Relevant target for each of the three SDGs

Table below discusses the relevant SDG target for each three SDGs addressed by the project.

SDGs	Targets	
3. Good Health and Well beings	<ul> <li>By 2030, substantially reduce the number of deaths and illnesses from hazardous chemicals and air, water and soil pollution and contamination</li> </ul>	
7. Affordable and Clean Energy	<ul> <li>By 2030, ensure universal access to affordable, reliable and modern energy services</li> <li>By 2030, increase substantially the share of renewable energy in the global energy mix</li> <li>By 2030, expand infrastructure and upgrade technology for supplying modern and sustainable energy services for all in developing countries, in particular least developed countries, small island developing States, and land-locked developing countries, in accordance with their respective programmes of support</li> </ul>	
13. Climate Action	<ul> <li>Improve education, awareness-raising and human and institutional capacity on climate change mitigation, adaptation, impact reduction and early warning</li> <li>Promote mechanisms for raising capacity for effective climate change-related planning and management in least developed countries and small island developing States, including focusing on women, youth and local and marginalized communities</li> </ul>	

## B.6.2. Explanation of methodological choices/approaches for estimating the SDG outcome Baseline Emission

According to AMS-I.E. version og, para 20, the baseline emission reductions under a PA are calculated as the following:

$$BE_v = B_v \times f_{NRB,v} \times NCV_{biomass} \times EF_{projected\ fossil\ fuel}$$
 1

In which:

BE<sub>v</sub> Baseline Emissions during the year y (tCO<sub>2</sub>e)

B<sub>v</sub> Quantity of woody biomass that is substituted or displaced in tonnes

f<sub>NRB.y</sub> Fraction of woody biomass used in the absence of the project activity in year y

that can be established as non renewable biomass

NCV<sub>biomass</sub> Net calorific value of the non-renewable woody biomass that is substituted

(IPCC default for wood fuel: 0.0156 TJ/tonne. The value is according to the

methodology AMS I.E.

101.1 T PDD Page 12 of 33

 $\mathsf{EF}_{\mathsf{projected}.\mathsf{fossilfuel}}$ 

Emission factor for substitution of non renewable woody biomass by similar consumers. Use a value of  $63.7 \, \text{tCO}_2/\text{TJ}^5$ 

Following option a) of paragraph 21,  $B_y$  is "Calculated as the product of the number of households multiplied by the estimate of average annual consumption of woody biomass per household that is displaced by the project activity (tonnes/household/year)". Thus,  $B_y$  will be calculated as follows:

$$B_y = N_{HH} \times (BC_{BL,HH,y} - BC_{PJ,HH,y})$$
 Equation (2)

Where:

 $N_{HH}$  = Number of households in the project activity, number

 $BC_{BL,HH,y}$  = Average annual consumption of woody biomass per household before the start of the project activity, tonnes/household/year

 $BC_{PJ,HH,y}$  = If it is found that pre-project devices were not completely displaced but continue to be used to some extent, average annual consumption of woody biomass per household in the pre-project devices during the

project activity, tonnes/household/year

 $B_y$  will be calculated multiplying with the actual household of this PA that have operational digester in year y identified through survey method. Calculations will be carried out based on Excel spread sheets using the database of PA that are already included. The database provides e.g. commissioning date.

#### **Project Emissions**

The AMS I.E Version 9 requires calculation of project emission using "TOOL16: Project and leakage emissions from biomass". As the fuelwood are basically sourced from the nearby and natural forest, which does not require processing of the feedstock and also does not include the cultivation, the project emissions (PE<sub>v</sub>) is not applicable to this PA and is taken as zero.

#### Leakage

As per para 24 of the AMS I.E version 9, the default factor of 0.95 is used to account for any potential leakage (i.e. By is multiplied by a net to gross adjustment factor of 0.95 to account for leakages).

Thus the leakage emission under a PA is calculated as the following:

$$LE_y = 0.05 \times B_y . f_{NRB.y} . NCV_{biomass} . EF_{projected\_fossilfuel}$$
 3

#### **Emission Reductions**

As the methodology AMS IE version 09, para 27, the emission reductions are to be estimated based on the following equation:

$$ER_{y} = BE_{y} - PE_{y} - LE_{y}$$

Where:

 $ER_y$  = Emission reductions in year y, tonnes CO<sub>2</sub>eq

#### B.6.3. Data and parameters fixed ex ante for monitoring contribution to each of the three SDGs

Relevant SDG Indicator	3.9.1 Mortality rate attributed to household and ambient air pollution	
Data/parameter	f <sub>NRB,y</sub>	
Unit	%	
Description	Fraction of woody biomass saved by the project activity during year y that can be established as non-renewable biomass	

This value represents the emission factor of the substitution fuels likely to be used by similar users, on a weighted average basis. The value is calculated, based on the global average ratio of cooking fuels (the normalized ratio of kerosene and liquefied petroleum gas (LPG) excluding coal), i.e. 9 per cent for kerosene (71.5 t CO2/TJ) and 91 per cent for LPG (63.0 t CO2/TJ).

101.1 T PDD Page 13 of 33

-

Source of data	Calculated as per "TOOL30: Calculation of the fraction of non-renewable biomass"	
Value(s) applied	86.1%	
Choice of dataorMeasurement methods and procedures	The value is calculated as 86.1% using the national statistics and also validated by the Ministry of Forest and Environment, Government of Nepal. This value is for the national level, so will not be monitored.	
Purpose of data	Calculation of baseline emission	
Additional comment	This parameter shall remain fixed for the crediting period.	

Relevant SDG Indicator	13.1.1 Number of countries that have communicated the establishment or operationalization of an integrated policy/strategy/plan which increases their ability to adapt to the adverse impacts of climate change, and foster climate resilience and low greenhouse gas emissions development in a manner that does not threaten food production (including a national adaptation plan, nationally determined contribution, national communication, biennial update report or other)
Data/parameter	EF <sub>projected_fossil fuel</sub>
Unit	tCO <sub>2</sub> /TJ
Description	Emission factor for the projected fossil fuel consumption in the baseline.
Source of data	Approved small scale methodology AMS.I.E (version 09)
Value(s) applied	63.7
Choice of dataorMeasurement methods and procedures	AMS-I.E. requires using this value.
Purpose of data	Emission Reduction calculation
Additional comment	N/A

Relevant SDG Indicator	7.1.2 Proportion of population with primary reliance on clean fuels and technology
Data/parameter	N <sub>HH</sub>
Unit	Numbers
Description	Number of households in each PA in year y
Source of data	BSP database
Value(s) applied	20,254 digesters
Choice of dataorMeasurement methods and procedures	The registration procedure of the database avoids double counting of digesters and the registration of digesters that have not been commissioned.
Purpose of data	Calculation of baseline emission
Additional comment	During calculation of Emission Reduction, it will be based on actual number of households having the biogas operational

Relevant SDG Indicator	3.9.1 Mortality rate attributed to household and ambient air pollution	
Data/parameter	ВС <sub>вь,нн,у</sub>	

101.1 T PDD Page 14 of 33

Unit	tonne/household/year	
Description	Average annual consumption of woody biomass per household before the start of the project activity	
Source of data	Based on survey (Biogas User Survey (BUS)) for project activity	
Value(s) applied	5.04	
Choice of dataorMeasurement methods and procedures	Calculated using option (b) Historical data or a sample survey conducted as per the latest version of the "Standards:Sampling and surveys for CDM project activities and programme of activities;"  Biogas User Survey follows the standard sampling and surveys guidelines indicated in the PDD registered for second crediting period.	
Purpose of data	Calculation of baseline emission	
Additional comment	This value is used in the calculations and shall remain fixed for the crediting period.	

#### B.6.4. Ex ante estimation of outcomes linked to each of the three SDGs

The emission reduction calculation is based on data that is specified to digester size and region. This section provides explanation of calculation made.

#### **Baseline Estimates**

#### **Baseline Emission**

According to AMS-I.E (version o9), the baseline emission under a PA are calculated as the following:

 $BE_y = B_y \times f_{NRB,y} \times NCV_{biomass} \times EF_{projected\_fossil\_fuel}$ 

In which:

BE<sub>v</sub> Baseline Emissions during the year y (tCO<sub>2</sub>e)

B<sub>v</sub> Quantity of woody biomass that is substituted or displaced in tonnes

f<sub>NRB,v</sub> Fraction of woody biomass used in the absence of the project activity in year y

that can be established as non renewable biomass, Use 86.1%

NCV<sub>biomass</sub> Net calorific value of the non-renewable woody biomass that is substituted

(IPCC default for wood fuel: 0.0156 TJ/tonne). The value is according to the

methodology AMS I.E.

EF<sub>projected.fossilfuel</sub> Emission factor for substitution of non renewable woody biomass by similar

consumers. Use a value of 63.7 tCO<sub>2</sub>/TJ<sup>7</sup>

#### Thus, B<sub>v</sub> will be calculated as follows:

, y	
N <sub>HH</sub>	20,254
BC <sub>BL,HH,y</sub>	5.04 tonne/household/year <sup>8</sup>
BC <sub>PJ,HH,y</sub>	o.54 tonnes/household/year <sup>9</sup>
Operational status of Biogas	100% <sup>10</sup>

By = 20,254\*100%\*(5.04-0.54) = 91,143 tonne/year

101.1 T PDD Page 15 of 33

 $<sup>^6</sup>$  The value is calculated using "TOOL 30: Calculation of the fraction of non-renewable biomass" and the value is fixed ex-ante.

<sup>&</sup>lt;sup>7</sup> This value represents the emission factor of the substitution fuels likely to be used by similar users, on a weighted average basis. The value is calculated, based on the global average ratio of cooking fuels (the normalized ratio of kerosene and liquefied petroleum gas (LPG) excluding coal), i.e. 9 per cent for kerosene (71.5 t CO2/TJ) and 91 per cent for LPG (63.0 t CO2/TJ).

<sup>&</sup>lt;sup>8</sup> Biogas User Survey 2017/18 for PA-3

<sup>9</sup> Biogas User Survey 2017/18 for PA-3

 $<sup>{\</sup>tt 10\,For\,ex\,ante\,100\%\,is\,taken\,however\,actual\,operational\,status\,is\,arrived\,using\,sample\,survey\,for\,expost}$ 

#### Considering

 $f_{NRB,y}$  = 86.1% (calculated using Tool 30: calculation of the fraction of non-renewable biomass NCV biomass = 0.0156 TJ/tonne (as per the methodology AMS I.E version 9)

 $EF_{projected\_fossil\_fuel} = 63.7 tCO_{2e}/TJ$  (as per the methodology AMS I.E version 9)

Baseline Emission is calculated as  $BE_v = 77.981 \text{ tCO}_{2e}$ 

Baseline estimation for SDG 13: 77,981 tCO2eq

#### Baseline estimation for SDG 3:

1) Users' perception on reduction in health problem: o% houdeholds perceived in reduction of eye infection, respiratory disease, cough and fire related injury (as using biomass for cooking)

#### Baseline estimation for SDG 7:

1) Users' perception on time saving due to project for firewood collection: o% houseolds for men, women and children as no biogas was used in baseline

## Project Estimates Project Emissions

 $PE_v = 0$ 

#### Leakage

The default factor of 0.95 is used to account for any potential leakage, as prescribed by the methodology. Thus the leakage emission under a PA is calculated as the following:

$$LE_v = 0.05*77,981 = 3,899 tCO_{2e}$$

Project estimates for SDG 13: 3,899 tCO2eq (project leakage)

#### Project Estimate for SDG 3:

Users' perception on reduction in health problem): 100% houdeholds perceive reduction in eye infection, respiratory disease, cough and fire related injury (As by using biogas, it is expected 100% users will perceive reduction)

#### Project estimation for SDG 7:

Users' perception on time saving due to project for firewood collection: 100% houseolds for men, women and children due to using biogas

#### Net benefit

#### **Emission Reductions**

As the methodology AMS IE version 09, para 27, the ex-ante emission reduction is estimated as below:

$$ER_y = BE_y - PE_y - LE_y$$
= 77,981 - 0 - 3,899
= 74,082 tCO<sub>2e</sub> (round down value).

Please refer ER calculation spreadsheet for further details of the calculation.

Net benefit for SDG 13: 74,082 tCO2eq

#### Net benefit for SDG 3:

101.1 T PDD Page 16 of 33

Users' perception on reduction in health problem): 100% houdeholds perceive reduction in eye infection, respiratory disease, cough and fire related injury (As by using biogas, it is expected 100% users will perceive reduction)

#### Net benefit for SDG 7:

Users' perception on time saving due to project for firewood collection: 100% houseolds for men, women and children due to using biogas

#### B.6.5. Summary of ex ante estimates of each SDG outcome

#### For SDG 13

Year	Baseline estimate	Project estimate	Leakage	Net benefit
Year A	77,981	0	3,899	74,082
Year B	77,981	0	3,899	74,082
Year C	77,981	0	3,899	74,082
Year D	77,981	0	3,899	74,082
Year E	77,981	0	3,899	74,082
Year F	77,981	0	3,899	74,082
Year G	77,981	0	3,899	74,082
Total	545,867	0	27,293	518,574
Total No of Crediting		7		
Years				
Annual average over				
the crediting period	77,981	0	3,899	74,082

#### For SDG 3 and SDG 7

Indicators	Baseline estimate	Project estimate	Net benefit
3.9.1 Mortality rate attributed to household and ambient air pollution (Users' perception on reduction in health			
problem)	0%	100%	100%
7.1.2 Proportion of population with primary reliance on clean fuels and technology (Users' perception on time			
saving due to project for firewood collection)	o%	100%	100%

#### B.7. Monitoring plan

#### B.7.1. Data and parameters to be monitored

Relevant SDG Indicator	3.9.1 Mortality rate attributed to household and ambient air pollution
Data / Parameter	NCV <sub>biomass</sub>
Unit	TJ/tonne
Description	Net calorific value of the non-renewable biomass that is substituted
Source of data	This value will be kept up to date with the IPCC guidelines.
Value(s) applied	0.0156
Measurement methods and procedures	AMS-I.E. Ver og requires using this value.
Monitoring frequency	N/A

101.1 T PDD Page 17 of 33

QA/QC procedures	N/A
Purpose of data	Emission Reduction calculation
Additional comment	NA

Relevant SDG Indicator	3.9.1 Mortality rate attributed to household and ambient air pollution
Data / Parameter	ВС <sub>РЈ,НН,у</sub>
Unit	tonnes/household/year
Description	Average annual consumption of woody biomass per household in the pre- project devices during the project activity, if it is found that pre-project devices were not completely displaced but continue to be used to some extent.
Source of data	Biogas User Survey
Value(s) applied	o.54 tonnes/household/year for the ex-ante calculation as per the Biogas User Survey for project activities. For this crediting period, this parameter will be determined using regular user survey.
Measurement methods and procedures	Biogas User Survey will be conducted on a sample of households. The sample size is determined to achieve 90% confidence interval and a 10% margin of error. During the survey, the estimates of the biogas users on the average annual consumption of woody biomass during the monitoring period will be captured.
Monitoring frequency	At least once every two years (biennial)
QA/QC procedures	Though the methodology requires sample survey biannually, PP conducts the user survey annually to ensure the number of biogas digesters operational for that particular year for PA and the consumption of the woody biomass by preproject device if any during the project activities.
Purpose of data	Calculation of baseline emission
Additional comment	ERs will be accounted only for functional biogas in the particular monitoring period

Relevant SDG Indicator	3.9.1 Mortality rate attributed to household and ambient air pollution
Data / Parameter	Ву
Unit	tones/year
Description	Quantity of woody biomass that is substituted or displaced
Source of data	Biogas User Surveys
Value(s) applied	This will be calculated based on the operational status of the biogas digesters for particular monitoring period and the woody biomass consumed by preproject devices during project activity. It ranges from zero when biogas is not in operation to 5.04 tonnes/household/year when BC <sub>PJ,HH,y</sub> is zero and biogas is operational.

101.1 T PDD Page 18 of 33

Measurement methods and procedures	The calculation of the By depends on the operational status of the biogas units for the particular monitoring period and the operational status will be checked annually during the Biogas User Survey. From the total population of biogas units included in the project activity, statistically representative samples will be drawn for the purpose of carrying out the survey. The sample size is determined to achieve 90% confidence interval and a 10% margin of error. The percentage of biogas units found to be operational during the sample survey shall be used to calculate the weighted average operational status of the biogas which then will be used to calculate By as follows: $By = N_{HH}*(BC_{BL,HH,y} - BC_{PJ,HH,y}) \text{ where } N_{HH} \text{ will be the household with operational biogas digester for the particular monitoring period.}$ $N_{HH} = N * P_{Y}, \text{ where N is the number of bio digesters installed in the project and Py is Proportion of Bio-digesters operational estimated based on the sample survey}$
Monitoring frequency	At least once every two years (biennial)
QA/QC procedures	Though the methodology requires sample survey biannually, PP conducts the user survey annually to ensure the number of biogas digesters operational for that particular year for PA.
Purpose of data	Calculation of baseline emission
Additional comment	Once the biogas included in the project activity completes its operational lifetime, those biogas will not be considered for the next consecutive monitoring.

Relevant SDG Indicator	3.9.1 Mortality rate attributed to household and ambient air pollution
Data / Parameter	Users' perception on reduction in indoor air pollution
Unit	Qualitative
Description	Users' perception on reduction in indoor air pollution
Source of data	Biogas User Survey
Value(s) applied	To be monitored
Measurement methods	Air quality will be assess through users interviews during the Biogas User
and procedures	Survey.
Monitoring frequency	at least biennial
QA/QC procedures	The selection of households under the surveys will ensure that these percentages are met also for PA; survey will try to capture the view of the women actually involved in cooking.
Purpose of data	Sustainable Development Assessment.
Additional comment	Requirements as defined in the sampling plan shall be met.

Relevant SDG Indicator	3.9.1 Mortality rate attributed to household and ambient air pollution
Data / Parameter	Reduction in health problem
Unit	Qualitative
Description	Users' perception on reduction in health problem
Source of data	Biogas User Survey
Value(s) applied	To be monitored
Measurement methods	Reduction in health problem will be assess through users interviews during
and procedures	the Biogas User Survey.
Monitoring frequency	at least biennial

101.1 T PDD Page 19 of 33

QA/QC procedures	The selection of households under the surveys will ensure that these percentages are met also for PA.
Purpose of data	Sustainable Development Assessment.
Additional comment	Requirements as defined in the sampling plan shall be met.

Relevant SDG Indicator	3.9.1 Mortality rate attributed to household and ambient air pollution
Data / Parameter	User's perception in Time saving for the cooking (reduce exposure to indoor air pollution)
Unit	Qualitative
Description	Users' perception on time saving for cooking due to project
Source of data	Biogas User Survey
Value(s) applied	To be monitored
Measurement methods and procedures	Assess through users interviews during the Biogas User Survey.
Monitoring frequency	at least biennial
QA/QC procedures	The selection of households under the surveys will ensure that these percentages are met also for PA; survey will try to capture the view of the women actually involved in cooking.
Purpose of data	Sustainable Development Assessment.
Additional comment	Requirements as defined in the sampling plan shall be met.

Relevant SDG Indicator	7.1.2 Proportion of population with primary reliance on clean fuels and technology
Data / Parameter	Time saving (Fuel wood collection)
Unit	Qualitative
Description	Users' perception on time saving due to project for firewood collection
Source of data	Biogas User Survey
Value(s) applied	To be monitored
Measurement methods and procedures	Assess through users interviews during the Biogas User Survey.
Monitoring frequency	at least biennial
QA/QC procedures	The selection of households under the surveys will ensure that these percentages are met also for PA.
Purpose of data	Sustainable Development Assessment.
Additional comment	Requirements as defined in the sampling plan shall be met.

Relevant SDG Indicator/Safeguarding Principle	3.9.3 Mortality rate attributed to unintentional poisoning
Data / Parameter	Users perception in reduction of chemical fertilizers
Unit	Qualitative
Description	Users' perception on reduction in use of chemical fertilizers and use of bio- slurry
Source of data	Biogas User Survey
Value(s) applied	To be monitored

101.1 T PDD Page 20 of 33

Measurement methods and procedures	Assess through users interviews during the Biogas User Survey.					
Monitoring frequency	least biennial					
QA/QC procedures	The selection of households under the surveys will ensure that these percentages are met also for PA.					
Purpose of data	Sustainable Development Assessment.					
Additional comment	equirements as defined in the sampling plan shall be met.					

Relevant SDG Indicator	3.9.2 Mortality rate attributed to unsafe water, unsafe sanitation and lack of hygiene (exposure to unsafe Water, Sanitation and Hygiene for All (WASH) services)				
Data / Parameter	Improved access to sanitation services				
Unit	Number				
Description	Users' perception on connection of toilet to biogas				
Source of data	Biogas User Survey				
Value(s) applied	To be monitored				
Measurement methods and procedures	User Survey				
Monitoring frequency	At least bi-Annual				
QA/QC procedures	The selection of households under the surveys will ensure that these				
	percentages are met also for PA.				
Purpose of data	Sustainable Development Assessment.				
Additional comment	Requirements as defined in the sampling plan shall be met.				

Relevant SDG Indicator/Safeguarding Principle	Safeguarding Principle 4.3.8
Data / Parameter	Impact on Crop Productivity
Unit	Qualitative
Description	Users' perception on Impact on crop productivity (comparing to baseline)
Source of data	Sampling Surveys/Annual usage survey/Monitoring survey
Value(s) applied	To be monitored
Measurement methods	Assess through users interviews during the Biogas User Survey.
and procedures	
Monitoring frequency	at least biennial
QA/QC procedures	The selection of households under the surveys will ensure that these
	percentages are met also for PA.
Purpose of data	Sustainable Development Assessment.
Additional comment	Requirements as defined in the sampling plan shall be met.

#### B.7.2. Sampling plan

The project monitoring system implemented in the project includes assessment of the performance of biogas units and collection of data to confirm the displacement of NRB.

#### 1) Digester performance and average annual consumption of woody biomass

The performance of the bio-digesters and average annual consumption of woody biomass by project devices will be assessed based on the performance reports (Biogas User Survey). The corresponding survey may be conducted as part of the quality control procedures of AEPC.

101.1 T PDD Page 21 of 33

The annual Biogas User Survey (BUS) will be conducted to assess the parameters given above. The survey will be conducted following statistically sound sampling procedure. The Annual Biogas User Survey will be conducted following the Standard for Sampling and Surveys for CDM Project activities and Programme of Activities Ver. 4.0 (EB86, Annex 4). As part of the survey, statistically representative sample of biogas users will be surveyed and in order to achieve 90% confidence interval and a 10% margin of error requirement for the sampled parameters. Stratified random sampling will be applied in conducting survey. The sample to be surveyed will be drawn randomly from the population of biogas digester distributed in each stratum (i.e. remote hill, hill and terai) spread within the project boundary.

The target population is the households using biogas digester units spread over in Terai, hill and Remote Hill of Nepal where a total of 20,254 biogas digesters units were installed under the Biogas Support Program - Nepal Activity-3. The population is distributed across Nepal.

The sample size determination is applied to the entire population of users of biogas plants (households). The total population is used for the sampling size calculation is 20,254 biogas plants. As required in AMS-I.E, Version 09, for annual survey, the sample has to be determined with 90/10 confidence/precision level.

#### Proportional Parameter (Biogas Performance)

The percentage of digesters operational is a proportion value for the categorical data requiring two possible answers (YES or NO). The minimum sample size is calculated using appendix 1 para 24 of Standard for Sampling and Surveys for CDM Project activities and Programme of Activities Ver. 4.0 (EB86, Annex 4).

$$n \ge \frac{1.645^2 \, NV}{(N-1) \times 0.1^2 + 1.645^2 V}$$

Where:

N = Total Population (9692)

n = sample size

$$V = \frac{SD^2}{\overline{p}^2} = \frac{\text{overall variance}}{\overline{p}^2}$$
 and  $\overline{p}$  is the overall proportion.

$$SD^2 = \frac{\left(g_a \times p_a(1-p_a)\right) + p_b \left(g_b \times (1-p_b)\right)}{N}$$

and

$$\overline{p} = \frac{(g_a \times p_a) + (g_b \times p_b) + (g_c \times p_c) + \dots + (g_k \times p_k)}{N}$$

Where.

 $g_i$  is the size of the  $i_{th}$  group and  $p_i$  is the expected proportion of  $i_{th}$  group. The sample in each strata then will be calculated as below:

$$n_i = \frac{g_i}{N} \times n$$

To calculate the sample size, following parameters are considered for this project activities.

Particulars	Symbol	Value	Remarks
Total Number of Population	N	20,254	Database

101.1 T PDD Page 22 of 33

Number of Biogas in Terai	gt	11,953	Database
Expected operational Proportion of			As per Biogas User Survey 2017/18
Biogas in Terai	p <sub>t</sub>	0.83	for the project activity
Number of Biogas in Hill	g <sub>h</sub>	8129	Database
Expected operational Proportion of			As per Biogas User Survey 2017/18
Biogas in Hill	$p_h$	0.76	for the project activity
Number of Biogas in Remote Hill	g <sub>rh</sub>	172	Database
Expected operational Proportion of			As per Biogas User Survey 2017/18
Biogas in Remote Hill	$p_{rh}$	0.75	for the project activity

The sample size is calculated as 66. In order to anticipate any low response rate and answers bias, at least 10% oversampling has to be done with minimum sample of 75 is retained for the monitoring of operational status of the Biogas digesters.

For the first monitoring, the values as described above are applied. For the following monitoring periods, the estimates shall be adjusted taken the results of the previous monitoring period(s) into account. The project participants can use a sample size larger than the minimum calculated depending on budget availability. The actual sample size will be established for each biogas users survey.

## Mean value parameter (Average annual consumption of woody biomass by pre-project device during project activity)

The minimum sample size for the monitoring parameters is determined using the equation given in para 60 of appendix 1, EB 86 Annex 4, Guidelines for Sampling and Surveys for CDM Project activities and Programme of Activities Ver. 4.0.

$$n \ge \frac{1.645^2 \, NV}{(N-1) \times 0.1^2 + 1.645^2 \, V}$$

Where,

 $V = (SD/Mean)^2$ 

n = Sample Size

N = Total number of Population

SD = Overall standard deviation

Mean = Overall mean for the average annual woody biomass consumption by pre-project device during project activity

1.645 = Represent 90% confidence required

o.1 = Represent the 10% relative precision

To calculate the sample size, following parameters are considered for this project activities.

Particulars	Symbol	Value	Remarks
Total Number of Population	N	20,254	Database
			As per Biogas User Survey 2017/18
Overall standard deviation	SD	0.27	for the project activity
			As per Biogas User Survey 2017/18
Overall mean	Mean	0.54	for the project activity

101.1 T PDD Page 23 of 33

The sample size is calculated as 68. Since minimum sample required for the proportional parameter is retained as 75, same samples will be taken for the mean value parameters conservatively. So, for the monitoring of this activity, minimum 75 samples will be retained to monitor all parameters.

#### B.7.3. Other elements of monitoring plan

The various aspects to be monitored according to the methodology are presented in the table below:

Aspects to be monitored according to	Applicability to the	Parameter to be
Methodology	Project	Monitored (YES/NO/NA)
Monitoring shall consist of checking of all appliances or a representative sample thereof, at least once every two years (biennial) to ensure that they are still operating or are replaced by an equivalent in service appliance.	Emission reductions is directly proportional to the number of appliances (digesters in case of the project) still performing. So this needs to be monitored.	Yes (based on operation reports carried out at least biennial)
In order to assess the leakages, monitoring shall include data on the amount of woody biomass saved under the project activity that is used by non project households/users (who previously used renewable energy sources). Other data on nonrenewable woody biomass use required for leakage assessment shall also be collected	The methodology allows the use of a default factor of 0.95 to account for leakage. So this will not be monitored in the project.	No (Instead a default factor of o.95 shall be used)
Monitoring should confirm the displacement or substitution of the non-renewable woody biomass at each location.	This shall be ensured by monitoring the number of appliances (digesters in case of the project) still performing	Yes (based on the performance reports carried out at least biennial, e.g. BUS, and in addition to eligibility criteria that also confirm use of NRB)
Sustainable development parameters and safeguarding principles to be assessed as per PDD	This shall be ensured by different parameters listed in B.7.1 above	Yes (Biogas User Survey Report conducted at least Biennial following the applicable sampling guideline for PA)

#### SECTION C. Duration and crediting period

#### C.1. Duration of project

#### C.1.1. Start date of project

07/04/2005

Biogas digester units were installed between 07/04/2005 and 08/05/2006.

#### C.1.2. Expected operational lifetime of project

21 years

101.1 T PDD Page 24 of 33

#### C.2. Crediting period of project

#### C.2.1. Start date of crediting period

13/12/2018 as the first crediting is ended on 12/12/2018. This pertains to the starting date of the second CDM crediting period. The GS crediting period start date is the date before 2 years from the inclusion date (Design Certification) in GS

The length of the first CDM crediting period was from 13/12/2011 to 12/12/2018.

#### C.2.2. Total length of crediting period

7 years. This pertains to the length of the second CDM crediting period

#### SECTION D. Safeguarding principles assessment

#### D.1. Analysis of social, economic and environmental impacts

Safegua	Assessment questions	Assessmen	Justification	Mitiga
rding		t of		tion
principle		relevance		meas
		to the		ure (if
		project		requir
		(Yes/poten		ed)
		tially/no)		
3.1. Human Right	a. The Project Developer and the Project shall respect internationally proclaimed human rights and shall not be complicit in violence or human rights abuses of any kind as defined in the Universal Declaration of Human Rights b. The Project shall not discriminate with regards to participation and inclusion.	a. No b. No	<ul> <li>a. The project doesn't involve any activity that affects human right but promotes the human rights to have access to clean energy and environment.</li> <li>Conclusion: the parameter will not be monitored.</li> <li>b. The project shall not discriminate any people to have biogas plants rather it enhances the participation and inclusion.</li> <li>Conclusion: the parameter will not be monitored.</li> </ul>	
3.2 Gender Equality and Women' s Rights	<ul> <li>1. The Project shall complete the following gender assessment questions in order to informRequirements</li> <li>2-4, below:</li> <li>a) Is there a possibility that the Project might reduce or put at risk women's access to or control of resources, entitlements and benefits?</li> <li>b) Is there a possibility that the Project can adversely</li> </ul>	a) No b) No	a) The project enhances the women's access and entitlement of benefits. Since the women will be direct user of the Biogas stoves, it will benefit women by reducing their exposure to the indoor air pollution thereby improving their health. In addition, the replacement of firewood after the installation of Biogas will reduce workload of women for the collection of firewood. Reduced workload for firewood collection results in time saving that the	

101.1 T PDD Page 25 of 33

 _	101110101101				
	affect men and women				women can use for other
	in marginalised or				productive activities.
	vulnerable communities	c)	No		Conclusion: the parameter will
	(e.g., potential increased				not be monitored
	burden on women or			b)	The project will not adversely
	social isolation of men)?				affect men and women in
c)	Is there a possibility that				marginalized or vulnerable
•	the Project might not				communities. Implementation of
	take into account gender				the project will contribute towards
	roles and the abilities of				preservation of common resources
	women or men to	d)	Yes		in form of "firewood". Households
	participate in the	/			duties related to firewood
	decisions/designs of the				collection, cooking and cleaning
	project's activities (such				utensils remain with women. The
	as lack of time, child care				project therefore tends to decrease
	duties, low literacy or				burden on women and won't result
	educational levels, or	e)	No		in social isolation of men.
	societal discrimination)?	<b>C</b> )	INO		
٦,					Conclusion: the parameter will not be monitored
d)	3			۵)	
	into account gender roles and the abilities of			c)	The project duly accounts the
		r	NI-		gender roles. Time saving is one of
	women or men to benefit	f)	No		the key benefits from the project
	from the Project's				which the beneficiary can utilize to
	activities (e.g., Does the				fulfill their gender roles. With the
	project criteria ensure				saved time, one can perform the
	that it includes minority				respective gender role more
	groups or landless				effectively.
	peoples)?	g)	No		Conclusion: the parameter will
e)	Does the Project design				not be monitored
	contribute to an increase			d)	The project shall make every effort
	in women's workload				to include landless people in its
	that adds to their care				design. Benefits from the project is
	responsibilities or that				expected to culminate in form of
	prevents them from				creation of entrepreneurial
	engaging in other				opportunities. While the focus is on
	activities?				capacitating women to take
f)	Would the Project				advantage of the entrepreneurial
	potentially reproduce or				opportunity, the project shall not
	further deepen				deprive men from the families of
	discrimination against				minority groups or the landless
	women based on gender,				people to take advantage of the
	for instance, regarding				capacity building activities.
	their full participation in				
	design and				Conclusion: the parameter will
	implementation or				not be monitored as the PA is
	access to opportunities				implemented already
	and benefits?				
g)	Would the Project			e)	No, the project is not designed
_	potentially limit women's				such that it increased workload of
	ability to use, develop				women and their care
	and protect natural				responsibilities. By introducing
	resources, taking into				Biogas , the overall performance of
	account different roles				women in kitchen will be more

101.1 T PDD Page 26 of 33

4-010	Stariuaru			
	and priorities of women and men in accessing and managing environmental goods and services?  h) Is there likelihood that the proposed Project would expose women and girls to further risksor hazards?		efficient. This will enable them engage in other activities.  Conclusion: the parameter will not be monitored  f) The project will enhance social participation and decision making role of women. Moreover, the women are expected to develop entrepreneurial skills which will enable them economically to deal with the household problems. The potential of the project to enable women economically will help reduce discrimination against women rather than deepening it.  Conclusion: The parameter will not be monitored	
3.3 Commu nity Health, Safety and Working Conditio ns	1. The Project shall avoid community exposure to increased health risks and shall not adversely affect the health of the workers and the community	Yes	The Project shall make every effort to avoid health risks of worker during construction of biogas. Emission reduction and reduction on indoor air pollution is one of the key benefits of the project for community that will improve the health of those communities.  Conclusion: Since the PA is registered already in CDM and all the biogas are constructed already, health risk of the worker will not be monitored but the emission reduction and improve in health condition will be monitored.	
3.4.3 Land Tenure and Other Rights	a. Does the Project require any change to land tenure arrangements and/or other rights?	No	The project units are simple and small in dimension. This will not involve anything related to removal of sites, objects or structures of cultural significance. Therefore the safeguarding principle under discussion will not be triggered by the project.  Conclusion: the parameter will not be monitored	
3.5 Corrupti on	1. The Project shall not involve, be complicit in or inadvertently contribute to or reinforce corruption or corrupt Projects.	No	The project implementation is guided by the government 's subsidy policy and duely followed the set quality standard. Quality assurance and quality control is an intregal part of the project impleentation ensuring the quality throughout the project cycle. Conclusion: The parameter will not be monitored.	
3.6.2 Negativ e	a. The Project Developer shall demonstrate the	No	The project units are simple and have less moving parts. So, it requires less	

101.1 T PDD Page 27 of 33

	Staridard	1	-	
Economi c Consequ ences	financial sustainability of the Projects implemented, also including those that will occur beyond the Project Certification period.  b. The Projects shall consider economic impacts and demonstrate a consideration of potential risks to the local economy and how these have been taken into account in Project design, implementation, operation and after the Project.  Particular focus shall be given to vulnerable and marginalised social groups in targeted communities and that benefits are socially-inclusive and sustainable.  Will the Project increase	No	repair and maintenance. Hence the operational cost is less in comparision to the energy access and the additional benefits that it offers. So, the project implemented is sustainable financially and has positive economic impacts by offering the time saving, ease in cleaning the utensils, reducing health risk and indoor air pollution etc. This has no any negative economic impacts.  Conclusion: the parameter will not be monitored  The project will replace the use of non-	
4.1.1 Emissio	greenhouse gas	INO	renewable biomass. The baseline of	
ns	emissions over the Baseline		the project is the use of firewood for	
	Scenario?		cooking. So, this project will reduce the	
			GHG over the baseline scenario.	
			Conclusion: The parameters will be calculated based on the operational	
			status of the project units	
4.1.2	Will the Project use energy	No	The project will not use any fuel	
Energy	from a local grid or		resources that provides for other local	
Supply	power supply (i.e., not		users. It uses the animal dung.	
	connected to a national or		Therefore the safeguarding principle	
	regional grid) or fuel resource		under discussion will not be triggered	
	(such as wood, biomass) that		by the project.	
	provides for other local		Conclusion: the parameter will not be	
	users?		monitored	
4.2.1	Will the Project affect the	No	The project requires very less water to	
Impact	natural or pre-existing		make the slurry that can be fetched at	
on	pattern of watercourses,		household level itself. Therefore the	
natural	ground-water and/or the		safeguarding principle under	
water	watershed(s) such as high		discussion will not be triggered by the	
patterns	seasonal flow variability,		project.	
and flow	flooding potential, lack of		Conclusion: the parameter will not be	
	aquatic connectivity or water		monitored	

101.1 T PDD Page 28 of 33

	Stariuaru	1	
	scarcity?		
4.2.2 Erosion and/or water body stability	Could the Project directly or indirectly cause additional erosion and/or water body instability or disrupt the natural pattern of erosion?	No	The project units are installed at household level which will not directly or indirectly cause additional erosion or disrupt the water body. Therefore the safeguarding principle under discussion will not be triggered by the project.  Conclusion: the parameter will not be monitored
4.3.1 Landsca pte modifica tion and soil	Does the Project involve the use of land and soil for production of crops or other products?	No	The project doesn't involve use of land and soil for production or crops or other products. Therefore the safeguarding principle under consideration will not be triggered by the project.  Conclusion: the parameter will not be monitored.
4.3.2 Vulnera bility to Natural Disaster	Will the Project be susceptible to or lead to increased vulnerability to wind, earthquakes, subsidence, landslides, erosion, flooding, drought or other extreme climatic conditions?	No	The project units are household based units and are less succesptible to the natural disasters. Therefore the safeguarding principle under consideration will not be triggered by the project.  Conclusion: the parameter will not be monitored.
4.3.3 Genetic Resourc es	Could the Project be negatively impacted by the use of genetically modified organisms or GMOs (e.g., contamination, collection and/or harvesting, commercial development)?	No	The project doesn't involve any activity related to GMOs. Therefore the safeguarding principle under consideration will not be triggered by the project.  Conclusion: the parameter will not be monitored.
4·3·4 Release of pollutan ts	Could the Project potentially result in the release of pollutants to the environment?	No	The project units generally yields the Biogas and Bio-slurry. The biogas is used for the cooking purposes whereas the bioslurry is used as nutrients (manure) in the agriculture field.  Therefore the safeguarding principle under consideration will not be triggered by the project.  Conclusion: the parameter will not be monitored.
4-3-5 Hazardo us and Non-	Will the Project involve the manufacture, trade, release, and/ or use of hazardous and	No	The project unit does not require or releases any hazardous and non-hazardous chemicals. Therefore the safeguarding principle under

101.1 T PDD Page 29 of 33

	1 1 1 1 1			
hazardo	non-hazardous chemicals		consideration will not be triggered by	
US	and/or materials?		the project.	
Waste			Conclusion: the parameter will not be	
	Mellil British I il		monitored.	
4.3.6	Will the Project involve the	Yes	The project units produces the	
Pesticid	application of pesticides		bioslurry that potentially displaces the	
es and	and/or fertilisers?		chemical fertilizers. Basically due to good content of nitrogen in the	
fertilizer			fertilizer the bio-slurry is a potent	
S			replacer of the Urea .	
			Conclusion: the parameter will be	
			monitored through the perception	
			survey with the users.	
4.3.7	Will the Project involve the	No	The project doesn't involve any activity	
Harvesti	harvesting of forests?		that requires harvesting of forest	
ng of	narvesting or rollests.		products. Therefore the safeguarding	
			principle under consideration will not	
forests			be triggered by the project.	
			Conclusion: the parameter will not be	
			monitored.	
4.3.8	Does the Project modify the	Yes	The project units produces the	
Food	quantity or nutritional quality		bioslurry that potentially increases the	
	of food available such as		productivity of crop as it has good	
	through crop regime		content of nitrogen.	
	alteration or export or		Conclusion: the parameter will be	
	•		monitored through the perception	
	economic incentives?		survey with the users.	
4.3.9	Will the Project involve	No	The project doesn't involve any activity	
Animal	animal husbandry?		that requires animal husbandry.	
Husband			Therefore the safeguarding principle under consideration will not be	
ry			triggered by the project.	
			Conclusion: the parameter will not be	
			monitored.	
			monitorea.	

#### SECTION E. Local stakeholder consultation

#### E.1. Solicitation of comments from stakeholders

Please refer to the section E of the registered CDM-PDD (version 12 dated 16/09/2019) for the stakeholder consultation as per CDM requirement.

Households participate voluntarily in the project and by buying the digesters they value the environmental, social and economic benefits that the project brings.

In addition, the satisfaction of the digester users is annually evaluated through the Biogas Users Survey. The BUS is an in-depth analysis of a broad range of topics, including social-economic impact, agriculture, energy and environment, health and sanitation, gender and finally digester operation. The BUS is implemented by an external consultant and concludes with a set of recommendations for improvement of the project. Some quotes from the conclusions of the BUS for 2007/08 are:

• "The biogas plant, as per the present finding, shows a strong positive impact on socio-economic status of the user households."

101.1 T PDD Page 30 of 33

- "Biogas has been successful at making positive environmental impacts at local national and global level. From local perspective, biogas has been successful at improving indoor air quality at homes which before availability of biogas used to use traditional stoves. From a national perspective, biogas systems have helped reduce pressure on forest resources."
- "Deriving from the findings, it can be concluded that the level of awareness among people regarding the significance of health, hygiene and sanitation in and around their household has increased remarkably."
- "Women in Nepal are normally confronted with high workload. (...) Workload of women has
  further increased due to deforestation as more time has to spend on collection of firewood and
  fodder. Introduction of biogas has made a positive effect in reducing women's workload."
- "All of the surveyed HHs was found satisfied with the plant operation."

Despite this effort to continuously improve the programme, a dedicated stakeholder consultation meeting was held on 15 August 2008 in Kathmandu. After an introduction of the project and its CDM background the stakeholder were invited to submit comments. The stakeholders included digesters users, representatives from different government ministries, NGO"s, donors and BSP-NEPAL and AEPC.

The comments have been filed and taken into account in the design of the BSP. Since the BSP has been successfully operated for many years, there were little comments on the technical aspects or negative side-effects of the program.

Key recommendations from the stakeholders seemed motivated by concerns over the ability of the program to maintain a certain pace of digester implementation and aimed at the institutional and financial aspect of the program.

#### E.2. Summary of comments received

The recommendations expressed by the stakeholders were:

- 1. Carbon revenue should be used for research and further development of the biogas sector.
- 2. The After Sales Service/Internal Quality Control system should be expanded from the current three-years to at least the length of the first crediting period. Apart from securing project performance in terms of reducing emissions, this also allows current digester owners to benefit from CDM funded maintenance of their systems.
- 3. Provide additional financial support to the individual households covered under the CDM project to ensure timely maintenance and reliable operation of their digesters.
- 4. Provide additional subsidy to the poor households in remote areas to help them overcome investment barrier and allow them access to the biogas technology.
- 5. Organize awareness programs about CDM at different levels in Nepal to create further awareness of the CDM and the opportunities it creates in Nepal.
- 6. Provide incentives from the CER revenues to the companies involved in digester manufacturing, installation and maintenance to secure their long-term commitment to supply high-quality digesters.
- 7. Carbon revenue can be used to develop additional carbon projects.
- 8. Invest in opportunities for household to generate financial revenues from time they save due to the installation of the biogas plant.

#### E.3. Report on consideration of comments received

Some of the recommendations, for example on the further promotion of CDM in Nepal, extend beyond the key objectives of the BSP. Most recommendations relate to use of the CDM revenues. First priority of AEPC is to sustain the BSP and create the financial means needed to increase the pace of implementation. Technical support to digester users are an integrated part of the BSP and CDM revenues will be used to sustain and, if possible, improve that support. CDM revenues will also be allocated to sustain and where possible improve subsidy rates and stimulate further dissemination of digesters.

101.1 T PDD Page 31 of 33

Of lower priority are measures to further enhance the programs" contribution to sustainable development, for example by implementing programs to create opportunities for household to generate financial revenues from time they save due to the installation of the biogas plant. Another example it support to other CDM projects or promotion of the CDM in Nepal. However, AEPC does support initiatives in these areas.

The remaining recommendations were taken into account as follows.

- AEPC, executive agency of the Biogas Support Program (BSP), has given high importance to the
  received suggestions and committed to address the suggestions to the benefit of the program and
  the stakeholders, especially the biogas users.
- AEPC has proposed to utilize 80 percent revenue to increase subsidy for new plants and thereby stimulate digester adoption by poorer and more remote households. The remaining 20 percent may be allocated to sustain the program and secure continued maintenance and other technical support to existing and future plants.
- AEPC also agreed to create further incentives to the private companies involved to provide additional technical service to the biogas users and maintain or further improve their quality standards.

101.1 T PDD Page 32 of 33

## Appendix 1. Contact information of project participants

Organization name	Alternative Energy Promotion Centre (AEPC)
Registration number with relevant authority	NA
Street/P.O. Box	Mid Baneshwor, Kathmandu
Building	
City	Kathmandu
State/Region	Bagmati
Postcode	
Country	Nepal
Telephone	+977-1-4498013
Fax	
E-mail	Madhusudhan.adhikari@aepc.gov.np
Website	www.aepc.gov.np
Contact person	Madhusudhan Adhikari
Title	Executive Director
Salutation	Mr.
Last name	Adhikari
Middle name	-
First name	Madhusudhan
Department	
Mobile	
Direct fax	
Direct tel.	+977-1-4498013
Personal e-mail	

## Appendix 2. Summary of post registration design changes

N/A

## **Revision History**

Version	Date	Remarks
1.1	24 August 2017	Updated to include section A.8 on 'gender sensitive' requirements
1	10 July 2017	Initial adoption

101.1 T PDD Page 33 of 33